

- Алматы (7273)495-231

Ангарск (3955)60-70-56

Архангельск (8182)63-90-72

Астрахань (8512)99-46-04

Барнаул (3852)73-04-60

Белгород (4722)40-23-64

Благовещенск (4162)22-76-07

Брянск (4832)59-03-52

Владивосток (423)249-28-31

Владикавказ (8672)28-90-48

Владимир (4922)49-43-18

Волгоград (844)278-03-48

Вологда (8172)26-41-59

Воронеж (473)204-51-73

Екатеринбург (343)384-55-89

Иваново (4932)77-34-06

Ижевск (3412)26-03-58

Иркутск (395)279-98-46

Казань (843)206-01-48

Калининград (4012)72-03-81

Калуга (4842)92-23-67

Кемерово (3842)65-04-62

Киров (8332)68-02-04

Коломна (4966)23-41-49

Кострома (4942)77-07-48

Краснодар (861)203-40-90

Красноярск (391)204-63-61

Курск (4712)77-13-04

Курган (3522)50-90-47

Липецк (4742)52-20-81
- Магнитогорск (3519)55-03-13

Москва (495)268-04-70

Мурманск (8152)59-64-93

Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12

Новокузнецк (3843)20-46-81

Ноябрьск (3496)41-32-12

Новосибирск (383)227-86-73

Омск (3812)21-46-40

Орел (4862)44-53-42

Оренбург (3532)37-68-04

Пенза (8412)22-31-16

Петрозаводск (8142)55-98-37

Псков (8112)59-10-37

Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15

Рязань (4912)46-61-64

Самара (846)206-03-16

Санкт-Петербург (812)309-46-40

Саратов (845)249-38-78

Севастополь (8692)22-31-93

Саранск (8342)22-96-24

Симферополь (3652)67-13-56

Смоленск (4812)29-41-54

Сочи (862)225-72-31

Ставрополь (8652)20-65-13

Сургут (3462)77-98-35

Сыктывкар (8212)25-95-17

Тамбов (4752)50-40-97

Тверь (4822)63-31-35
- Тольятти (8482)63-91-07

Томск (3822)98-41-53

Тула (4872)33-79-87

Тюмень (3452)66-21-18

Ульяновск (8422)24-23-59

Улан-Удэ (3012)59-97-51

Уфа (347)229-48-12

Хабаровск (4212)92-98-04

Чебоксары (8352)28-53-07

Челябинск (351)202-03-61

Череповец (8202)49-02-64

Чита (3022)38-34-83

Якутск (4112)23-90-97

Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

https://irinox.nt-rt.ru || ixo@nt-rt.ru



CONSOLES WITH SLOPING TOP MODEL QMB

Control console in AISI 304 stainless steel (Wnr 1.4301) with 70° sloping top and gas struts. Lower section with hinged door. Reversible lower door. Fixed rear panel. A divider separates the top and the lower sections. Each section comes with an internal mounting plate in 25/10 FeZn. IP 65 / IP 55 protection rating (according to dimensions).

TECHNICAL DESCRIPTION

Type of steel:	AISI 304 (Wnr 1.4301) Scotch-brite
Thickness:	1.5 mm (0.06")
Door:	solid
Door fixing:	hinges
Bottom door opening:	120°
Gasket:	polyurethane
Internal mounting plate:	included, in FeZn 25/10
Closing system:	5 mm (0.20") chromed Zamak lock with double bit insert
Bottom:	plain cable gland plate
Rear door:	over W ≥ 1000 mm (39.37")
Sloping top:	90° opening
Inclination angle:	70°
Sloping top fixing:	hinges

CUSTOMIZATION POSSIBILITIES

Dimensions: adaptable on request*

Thickness: adaptable on request*

Material: AISI 316L (Wnr 1.4404)

Finishes: SN Coarse brushed



Gasket: silicone*

* Check when placing order

ON REQUEST


stainless steel internal mounting plate

plinth

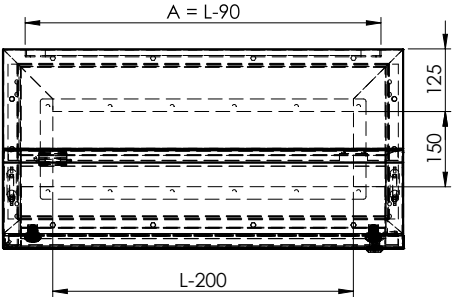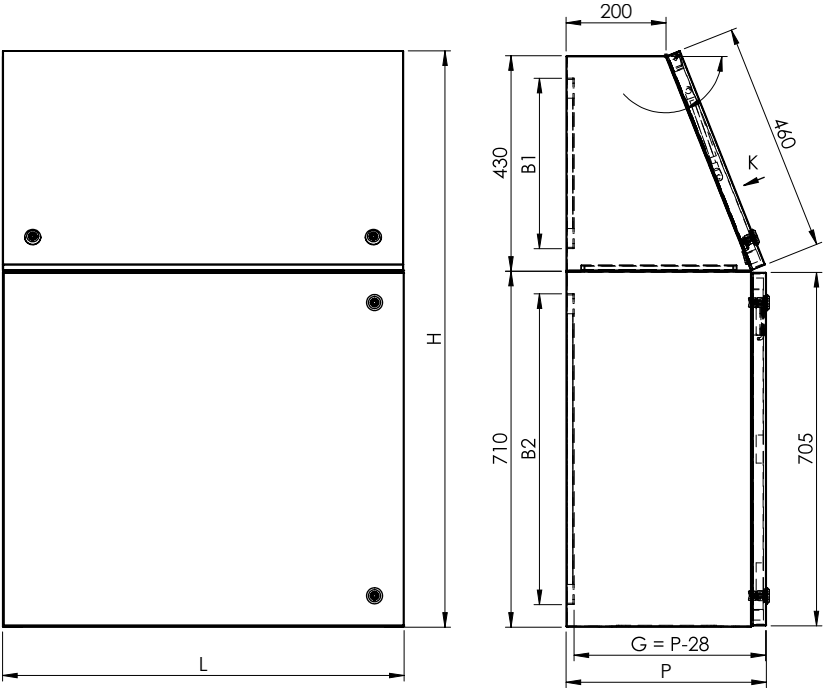

CONSOLES WITH SLOPING TOP MODEL QMB

L = W (width)
H = H (height)
P = D (depth)

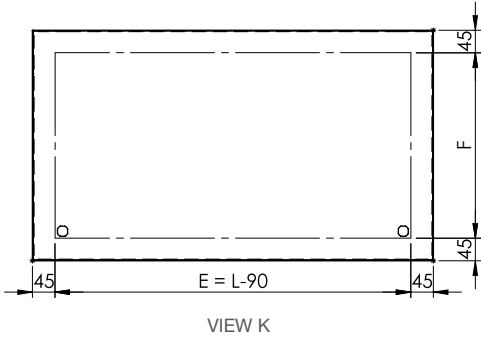

TECHNICAL DATA

upper fixed internal mounting plate (W - 90 mm) / (W - 3.54")

lower fixed internal mounting plate (W - 90 mm) / (W - 3.54")

sloped top drill size (W - 90 mm) / (W - 3.54")

usable depth D - 28 mm (1.10") (up to W=1000 mm) (up to W= 39.37")

lower door opening: 120°

sloping top opening angle

Model	Code	No. doors of lower section	External dimensions						Kg	m³	No. hinges	Upper internal mounting plate dimensions					Lower internal mounting plate dimensions				Sloping top drill size				Usable depth		Certification			Model	
			W		H		D					A		B1			A		B2		E		F		G		IP 65 IK 10	UL type 1,12,4,4x	EX 3D 3G		
			mm	in.	mm	in.	mm	in.				mm	in.	mm	in.		mm	in.	mm	in.	mm	in.	mm	in.							
QMB 604	013420010	1	600	23.62	1140	44.88	400	15.75	58,5	0,34	2	510	20.08	340	13.39		510	20.08	620	24.41	510	20.08	370	14.57	372	14.65	√			QMB 604	
QMB 804	013420020	1	800	31.50	1140	44.88	400	15.75	77,5	0,45	2	710	27.95	340	13.39		710	27.95	620	24.41	710	27.95	370	14.57	372	14.65	√			QMB 804	
QMB 1004	013420040	1	1000	39.37	1140	44.88	400	15.75	96,4	0,56	2	910	35.83	340	13.39		910	35.83	620	24.41	910	35.83	370	14.57	372	14.65	√			QMB 1004	
QMB 1204	013420060	2	1200	47.24	1140	44.88	400	15.75	115,4	0,67	2 per door	1100	43.31	1020	40.16		From QMB1204 Single adjustable internal mounting plate				1110	43.70	365	14.37	348	13.70	√			QMB 1204	
QMB 1404	013420080	2	1400	55.12	1140	44.88	400	15.75	134,3	0,78	2 per door	1300	51.18	1020	40.16						1310	51.57	365	14.37	348	13.70	√				QMB 1404
QMB 1604	013420100	2	1600	62.99	1140	44.88	400	15.75	153,3	0,89	2 per door	1500	59.06	1020	40.16						1510	59.45	365	14.37	348	13.70	√				QMB 1604
QMB 1804	013420120	2	1800	70.87	1140	44.88	400	15.75	172,2	1,00	2 per door	1700	66.93	1020	40.16						1710	67.32	365	14.37	348	13.70	√				QMB 1804
QMB 2004	013420140	2	2000	78.74	1140	44.88	400	15.75	191,2	1,11	2 per door	1900	74.80	1020	40.16						1910	75.20	365	14.37	348	13.70	√				QMB 2004