

CONTROL CONSOLES
AND PULPITS



CONSOLES WITH PLAIN
SLOPING TOP AND UPPER LID
MODEL DPEW

Control consoles in AISI 304 stainless steel with 10° sloping lower panel and 78° sloping upper panel with gas struts. Lower section with removable door. Screwed rear door. Complete with lifting eyebolts and two adjustable internal mounting plates in 25/10 FeZn.

Standard cable entry plinth H=100 mm (3.94”) with open bottom.

IP 65 / IP 55 protection rating (according to dimensions).

https://irinox.nt-rt.ru || ixo@nt-rt.ru

TECHNICAL DESCRIPTION

Type of steel: AISI 304 (Wnr 1.4301) Scotch-brite
Thickness: 1.5 mm (0.06”)
Door: solid
Door fixing: hinges / lower door: removable
Gasket: polyurethane
Internal mounting plate: included in 25/10 FeZn
Locking system: 5 mm (0.20”) chromed Zamak lock with double bit insert
Bottom: plain cable gland plate
Rear door: screwed
Sloping upper/lower panel: 10° sloping lower panel with 90° opening angle / 78° sloping upper panel / Sloping upper/lower panel fixing: hinges

CUSTOMIZATION POSSIBILITIES

Dimensions: adaptable on request*
Thickness: adaptable on request*
Material: AISI 316L (Wnr 1.4404)
Finishes: SN Coarse brushed
Gasket: silicone*

* Check when placing order

ON REQUEST

stainless steel internal mounting plate

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47



Казахстан +7(7172)727-132

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Киргизия +996(312)96-26-47


Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

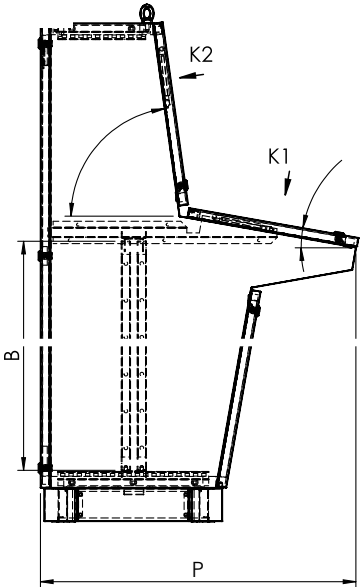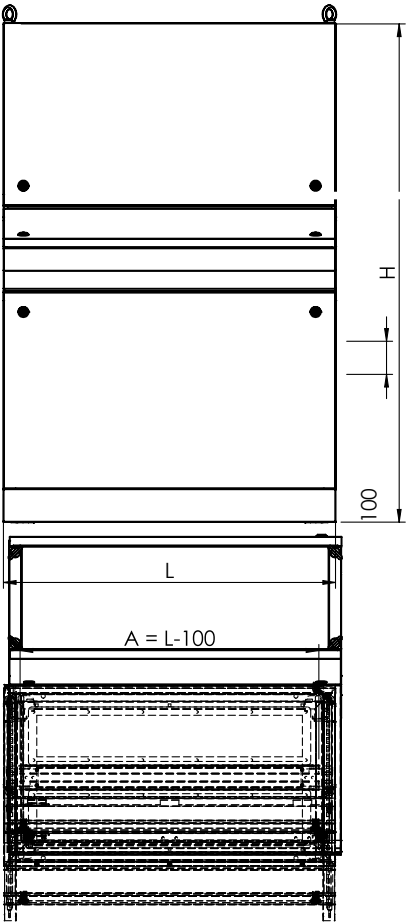


L = W (width)
H = H (height)
P = D (depth)

CONSOLES WITH PLAIN
SLOPING TOP AND UPPER LID
MODEL DPEW

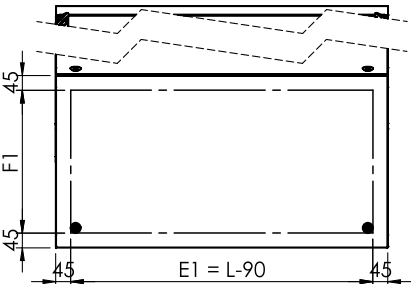

VIEW K1

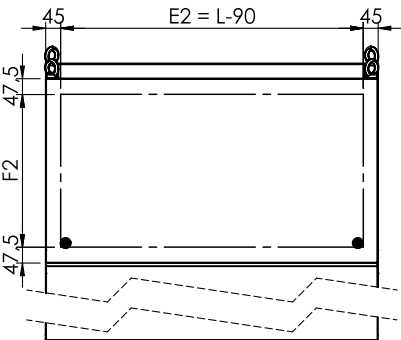

VIEW K2



TECHNICAL DATA

internal mounting plate	(W - 100 mm) (W - 3.94”)
sloping lower panel drill size for	for H - 1220: (W - 90 mm) (W – 3.54”) for H - 1500: (W - 90 mm) (W – 3.54”)
sloping upper panel drill size	for H - 1220: (W - 90 mm) (W – 3.54”) for H - 1500: (W - 90 mm) (W – 3.54”)

Model	Code	Cable gland plates W x P	External dimensions						Kg	m³	No. hinges		Upper internal mounting plate dimen- sions				Lower internal mounting plate adjustment	Sloping lower panel drill size				Sloping upper panel drill size				Certification		
			W		H		D						A		B			E1		F1		E2		F2		IP 65 IK 10	UL type 1,12, 4,4x	EX 3D 3G
			mm	in.	mm	in.	mm	in.					mm	in.	mm	in.		mm	in.	mm	in.	mm	in.	mm	in.			
DPEW 812	013430010	2 (600x 125 mm) / (23.62" x 4.92")	800	31.50	1220	48.03	820	32.28	102,9	0,94	2		700	27.56	690	27.17	from 50 to 400 mm / from 1.97" to 15.75"	710	27.95	400	15.75	710	27.95	240	9.45	√		
DPEW 1012	013430020	2 (700 x 125 mm) / (26.56" x 4.92")	1000	39.37	1220	48.03	820	32.28	128,6	1,17	2		900	35.43	690	27.17		910	35.83	400	15.75	910	35.83	240	9.45	√		
DPEW 1212	013430040	2 (1000x 125 mm) / (39.37" x 4.92")	1200	47.24	1220	48.03	820	32.28	154,4	1,41	2		1100	43.31	690	27.17		1110	43.70	400	15.75	1110	43.70	240	9.45	√		
DPEW 1412	013430060	2 (1200x 125 mm) / (47.24" x 4.92")	1400	55.12	1220	48.03	820	32.28	179,06	1,64	2		1300	51.18	690	27.17		1310	51.57	400	15.75	1310	51.57	240	9.45	√		
DPEW 1612	013430080	4 (600 x 125 mm) / (23.62" x 4.92")	1600	62.99	1220	48.03	820	32.28	204,8	1,87	2		1500	59.06	690	27.17		1510	59.45	400	15.75	1510	59.45	240	9.45	√		
DPEW 1812	013430100	4 (700 x 125 mm) / (26.56" x 4.92")	1800	70.87	1220	48.03	820	32.28	230,5	2,10	2		1700	66.93	690	27.17		1710	67.32	400	15.75	1710	67.32	240	9.45	√		
DPEW 2012	013430120	4 (800 x 125 mm) / (31.50" x 4.92")	2000	78.74	1220	48.03	820	32.28	256,2	2,35	2		1900	74.80	690	27.17		1910	75.20	400	15.75	1910	75.20	240	9.45	√		
DPEW 815	013430140	2 (600 x 125 mm) / (23.62" x 4.92")	800	31.50	1500	59.06	950	37.40	115,4	1,25	2		700	27.56	690	27.17		710	27.95	430	16.93	710	27.95	460	18.11	√		
DPEW 1015	013430160	2 (700 x 125 mm) / (26.56" x 4.92")	1000	39.37	1500	59.06	950	37.40	144,1	1,64	2		900	35.43	690	27.17		910	35.83	430	16.93	910	35.83	460	18.11	√		
DPEW 1215	013430180	2 (1000 x 125 mm) / (39.37" x 4.92")	1200	47.24	1500	59.06	950	37.40	172,8	1,96	2		1100	43.31	690	27.17		1110	43.70	430	16.93	1110	43.70	460	18.11	√		
DPEW 1415	013430200	2 (1200 x 125 mm) / (47.24" x 4.92")	1400	55.12	1500	59.06	950	37.40	200,5	2,29	2		1300	51.18	690	27.17		1310	51.57	430	16.93	1310	51.57	460	18.11	√		
DPEW 1615	013430220	4 (600 x 125 mm) / (23.62" x 4.92")	1600	62.99	1500	59.06	950	37.40	229,2	2,62	2		1500	59.06	690	27.17		1510	59.45	430	16.93	1510	59.45	460	18.11	√		
DPEW 1815	013430240	4 (700 x 125 mm) / (26.56" x 4.92")	1800	70.87	1500	59.06	950	37.40	257,8	2,95	2		1700	66.93	690	27.17		1710	67.32	430	16.93	1710	67.32	460	18.11	√		
DPEW 2015	013430260	4 (800 x 125 mm) / (31.50" x 4.92")	2000	78.74	1500	59.06	950	37.40	286,5	3,27	2		1900	74.80	690	27.17		1910	75.20	430	16.93	1910	75.20	460	18.11	√		