

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70


Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://irinox.nt-rt.ru> || ixo@nt-rt.ru

AIR-CONDITIONING SYSTEMS, VENTILATION AND OTHER ACCESSORIES

Solutions for customised designs
produced to customer specifications
and requirements, guaranteeing correct
functioning of components installed inside
electrical enclosures.

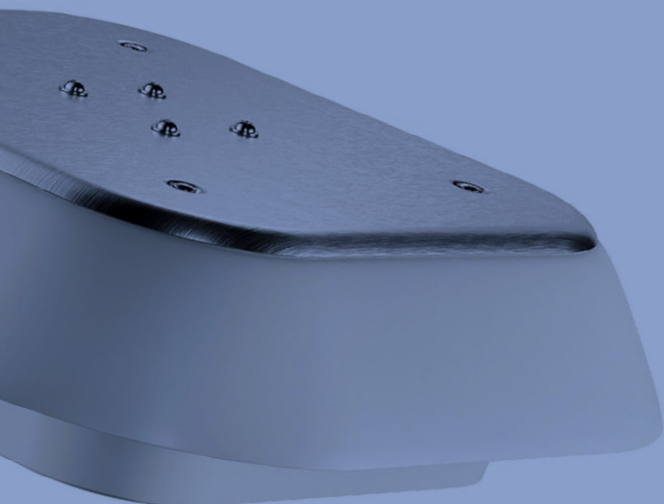

AIR CONDITIONING

150 WALL AND DOOR-MOUNTED
AIR CONDITIONERS
SERIES KCVE

152 **MODEL KCVE05**

153 **MODEL KCVE08**

154 **MODEL KCVE15**

155 **MODEL KCVE20**

156 TOP-MOUNTED AIR-CONDITIONERS
SERIES KETE

157 **MODEL KETE09**

157 **MODEL KETE14**

VENTILATION

158 **FILTER GROUP**
SERIES KFF

163 **TOP-MOUNTED FAN UNIT**
SERIES KTP

164 **AXIAL VENTILATION**
SERIES S

166 **ANTI-CONDENSATION HEATERS**

168 **THERMOSTATS**

169 **SENSIS**
SERIES KSNS

170 **THERMOELECTRIC UNITS**
SERIES KTCU

OTHER ACCESSORIES

172 **ARMS**

176 **LED DEVICES**

178 **OTHER ACCESSORIES**



EXPRESS WAREHOUSE

Committed to also supporting customers with unexpected requirements, IRINOX has developed an additional service to optimise supply times.

To consult the wide range of items available in the IRINOX warehouse, including all accessories for AIR-CONDITIONING and VENTILATION SYSTEMS

→ **GO TO PAGE 182**

WALL AND DOOR-MOUNTED AIR CONDITIONERS **SERIES KCVE**

Exterior cover: as standard in AISI 304 (Wnr 1.4301) stainless steel/
on request in AISI 316 (Wnr 1.4404) stainless steel

Rear panel and internal structure in FeZn

Refrigeration capacity: 550/2000 W

XCB electronic board + display: new controller featuring electronic
board located in evaporator compartment and display

General-alarm and remote-control contacts as standard

General alarm with change-over contact

Normally Open or Normally Closed

Test/approval procedure activated from display

SMART ENERGY MANAGEMENT (SEM): software control enabling
turning off of fan/evaporator in presence of low internal temperature
and period temperature control


Condenser and condensation dissipator: from model KCV11

Quick connections (CE version): see next page

Easy installation: two inserts for easy positioning of unit on wall of
electrical enclosure

IP protection rating in accordance with EN 60529:

External circuit IP34/Internal circuit IP54

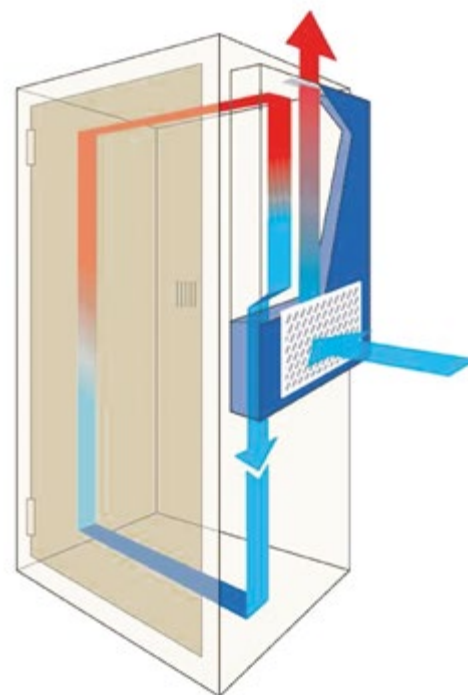


DETAIL OF ELECTRICAL CONNECTIONS

Quick connection (WAGO connector)
for CE models, new 9-pole connector
in the upper part of the air conditioner.

A/WAGO connector.

B/Terminal-block connection at rear
(inside) for UL Listed models.

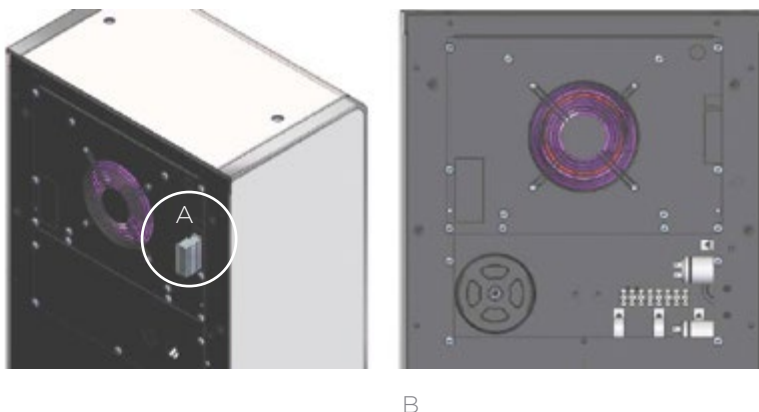

LIST OF MODELS

Code	Power W	Power supply V - ph - Hz
KCVE0500220800I	550/580	230 - 1 - 50/60
KCVE0800220800I	850/900	230 - 1 - 50/60
KCVE1500220800I	1500/1600	230 - 1 - 50/60
KCVE2000220800I	2100/2200	230 - 1 - 50/60
KCVE1500228800I	1400/1500	400 - 2 - 50/460 - 2 - 60
KCVE2000261800I	2000/2100	400 - 3 - 50/460 - 3 - 60

EXAMPLE OF ID PLATE SERIAL NUMBER



UL model codes	Power W	Power supply V - ph - Hz
KCVE05U120380	580	115 - 1 - 60
KCVE08U120380	900	115 - 1 - 60
KCVE15U120380	1600	115 - 1 - 60
KCVE20U126280	2100	400 - 3 - 50/460 - 3 - 60

CERTIFICATIONS - PROTECTION RATING

The product is considered as a finished product, and no longer as part of the system (UL recognised).



Product with Listed status saves time and money for subsequent approval procedures.

NEMA Type 12 protection rating for indoor use (models KCVE).



WALL-MOUNTED AIR CONDITIONER


MODEL KCVE05

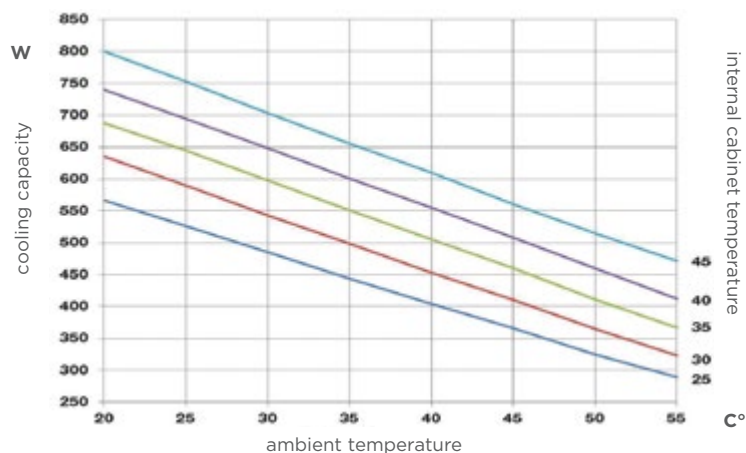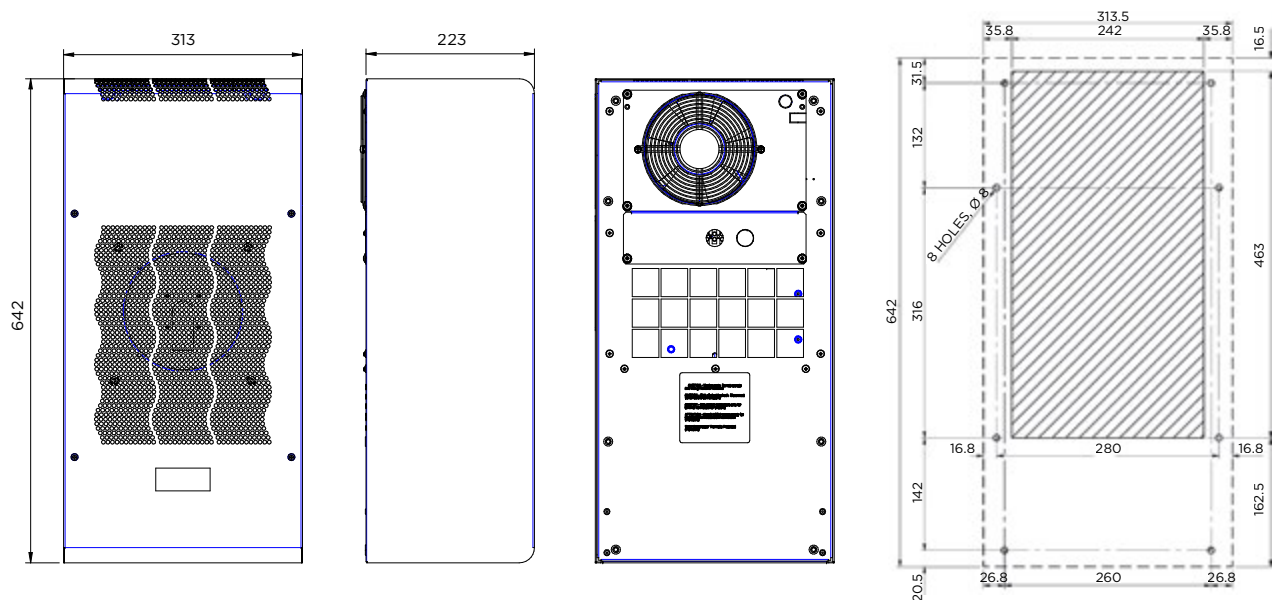

	Unit of measure	KCVE0500220800I	KCVE05U120380
Power supply	V - ph - Hz	230-1-50/60	115-1-60
Cooling power L35L35	W	550 - 580	580
Cooling power L35L50	W	410 - 430	430
Height/Width/Depth	mm	642 x 313 x 223	642 x 313 x 223
Max. current, operational	A	1.4/1.6	4.7
Current absorbed on start-up	A	7.5	17
T fuse	A	4	15
Power absorbed L35L50	W	320 - 390	390
Cabinet ventilation air flow	m ³ /h	164 - 195	195
Temperature regulation limits	°C	+25/+45	+25/+45
Temperature limits, ambient side	°C	+20/+55	+20/+55
Cabinet-side protection	IP/Type	54/ -	- / 12
Noise	dB(A)	61	61
Weight	kg	23	23

WALL-MOUNTED AIR CONDITIONER


MODEL KCVE08

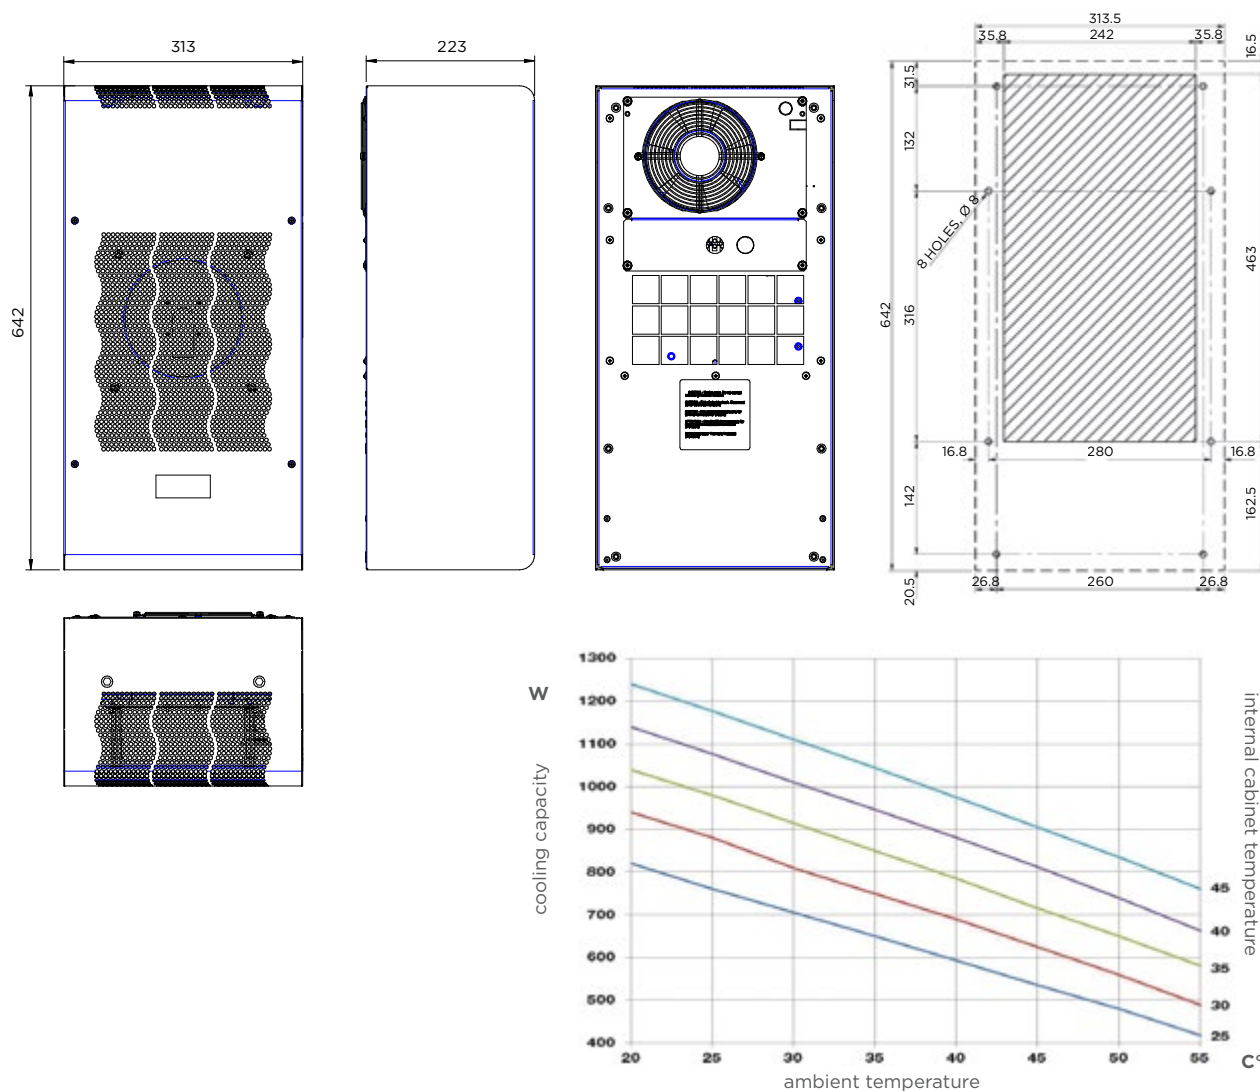

	Unit of measure	KCVE0800220800I	KCVE08U120380
Power supply	V - ph - Hz	230-1-50/60	115-1-60
Cooling power L35L35	W	850-900	900
Cooling power L35L50	W	620-700	700
Height/Width/Depth	mm	642 x 313 x 223	642 x 313 x 223
Max. current, operational	A	2.6/2.7	7.2
Current absorbed on start-up	A	20	28
T fuse	A	6	15
Power absorbed L35L50	W	420-600	600
Cabinet ventilation air flow	m3/h	340-356	390
Temperature regulation limits	°C	+25/+45	+25/+45
Temperature limits, ambient side	°C	+20/+55	+20/+55
Cabinet-side protection	IP/Type	54 / -	- / 12
Noise	dB(A)	64	64
Weight	kg	27	27

WALL-MOUNTED AIR CONDITIONER


MODEL KCVE15

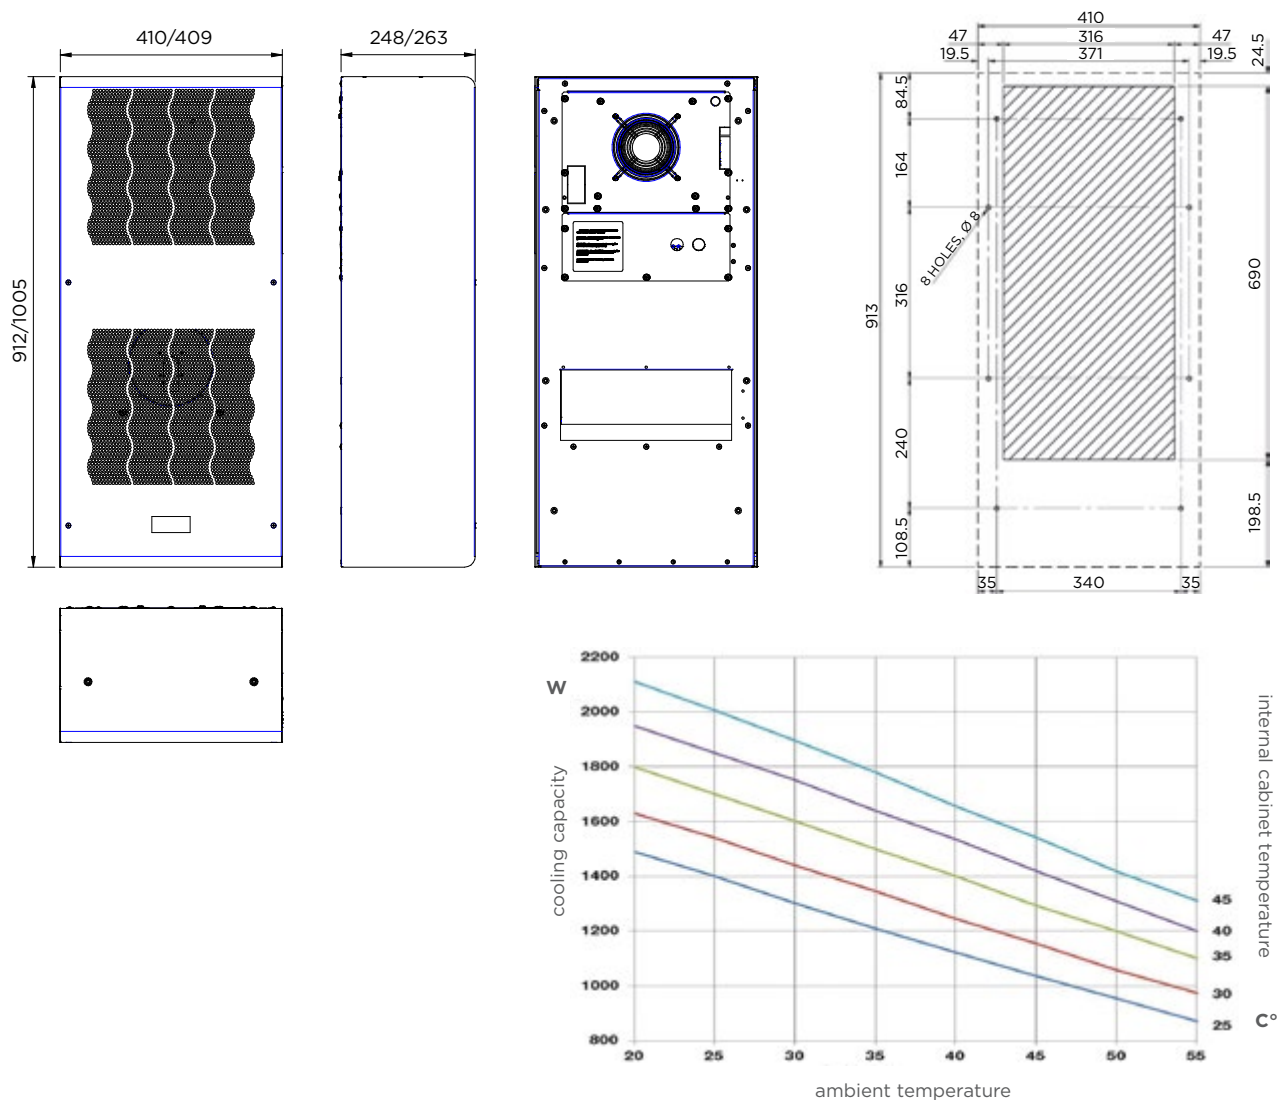

	Unit of measure	KCVE1500220800I	KCVE1500228800I	KCVE15U120380
Power supply	V - ph - Hz	230-1-50/60	400-2-50/460-2-60	115-1-60
Cooling power L35L35	W	1500-1600	1400-1500	1600
Cooling power L35L50	W	1200-1280	1150-1200	1280
Height/Width/Depth	mm	912 x 410 x 248	912 x 410 x 248	912 x 410 x 248
Max. current, operational	A	3.9/4.3	2.5/2.6	9.4
Current absorbed on start-up	A	28	110	50
T fuse	A	8	6	15
Power absorbed L35L50	W	750-825	750-825	825
Cabinet ventilation air flow	m ³ /h	540-580	540-580	580
Temperature regulation limits	°C	+25/+45	+25/+45	+25/+45
Temperature limits, ambient side	°C	+20/+55	+20/+55	+20/+55
Cabinet-side protection	IP/Type	54 / -	54 / -	- / 12
Noise	dB(A)	65	65	65
Weight	kg	46	53	46

WALL-MOUNTED AIR CONDITIONER

MODEL KCVE20

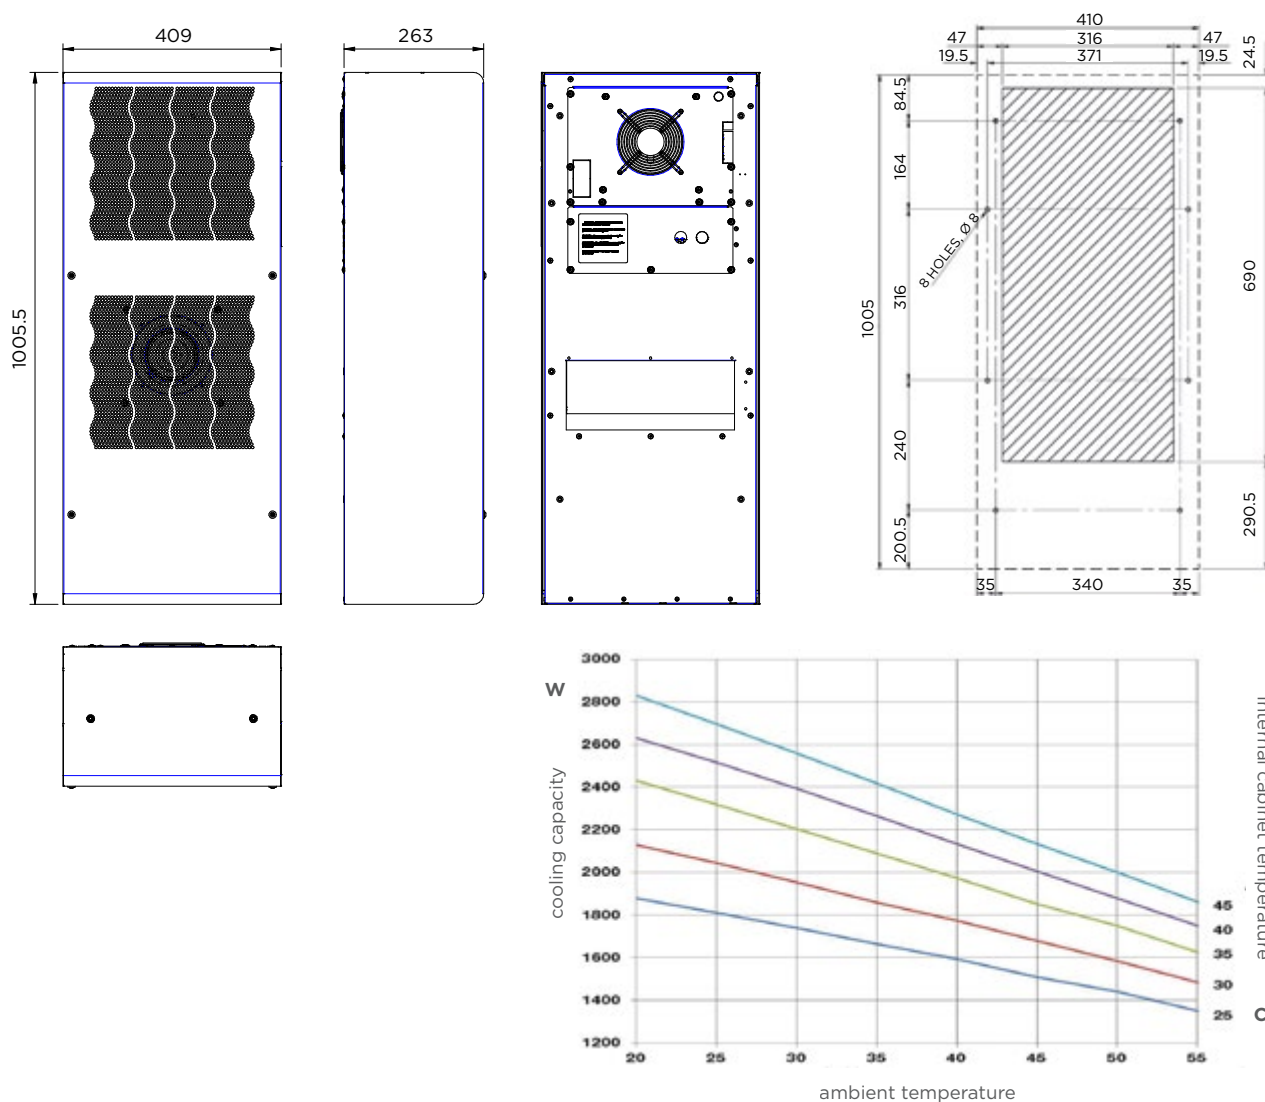

	Unit of measure	KCVE2000220800I	KCVE2000261800I	KCVE20U126280
Power supply	V - ph - Hz	230-1-50/60	400-3-50/460-3-60	400-3-50/460-3-60
Cooling power L35L35	W	2100-2200	2000-2100	2100
Cooling power L35L50	W	1750-1850	1700-1800	1800
Height/Width/Depth	mm	1005 x 409 x 263	1005 x 409 x 263	1005 x 409 x 263
Max. current, operational	A	4.8/5.5	2.5/2.7	3.62
Current absorbed on start-up	A	34	22	22
T fuse	A	10	6	15
Power absorbed L35L50	W	1120-1240	1100-1200	1200
Cabinet ventilation air flow	m3/h	540-580	890-930	930
Temperature regulation limits	°C	+25/+45	+25/+45	+25/+45
Temperature limits, ambient side	°C	+20/+55	+20/+55	+20/+55
Cabinet-side protection	IP/Type	54 / -	54 / -	- / 12
Noise	dB(A)	69	69	69
Weight	kg	48	48	48

TOP-MOUNTED AIR CONDITIONERS SERIES KETE

Top-mounted air conditioners

Exterior cover: as standard in AISI 304 (Wnr 1.4301) stainless steel /
on request in AISI 316 (Wnr 1.4404) stainless steel

Rear panel and internal structure in FeZn

ECB digital thermostat

Condensation dissipator: on model KETE140022870


Condensation-tank-full alarm contact:
on model KETE090122070

Quick connections: (CE version) with 9-pole connector

Option to invert thermostat position:
for model KETE140022870

General-alarm and remote-control contacts

IP protection rating in accordance with EN 60529:
External circuit IP34/Internal circuit IP54



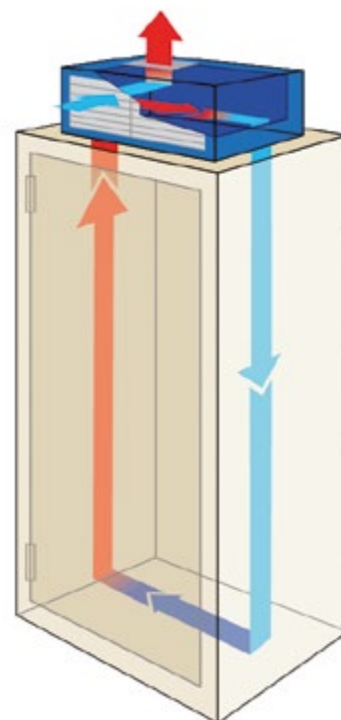


LIST OF MODELS

Code	Power W	Power supply V - ph - Hz
KETE0901220700I	900	230 - 1 - 50/60
KETE1400228700I	1400	400 - 2 - 50/460 - 2 - 60

TOP-MOUNTED AIR CONDITIONER




MODEL KETE09

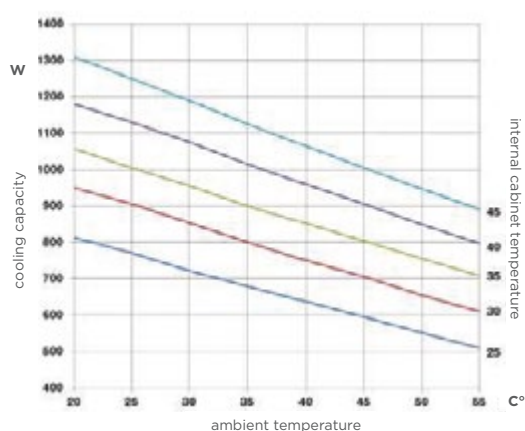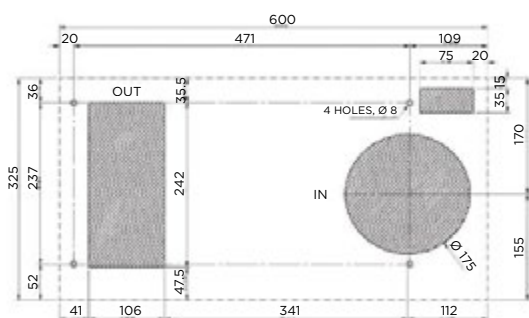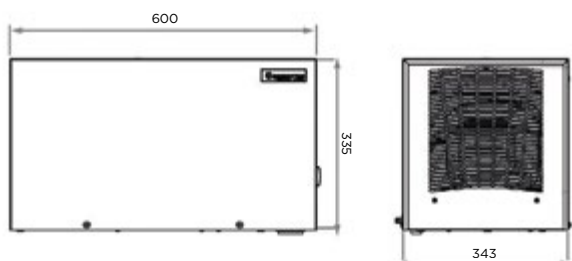

	Unit of measure	KETE09012207001
Power supply	V - ph - Hz	230-1-50/60
Cooling power L35L35	W	900
Cooling power L35L50	W	760
Height/Width/Depth	mm	335x600x325
Max. current, operational	A	3.2
Current absorbed on start-up	A	15
T fuse	A	6
Power absorbed L35L50	W	630
Cabinet ventilation air flow	m ³ /h	575
Temperature regulation limits	°C	25/45
Temperature limits, ambient side	°C	20/55
Cabinet-side protection	IP/Type	54
Noise	dB(A)	67
Weight	kg	31.5

TOP-MOUNTED AIR CONDITIONER

MODEL KETE14

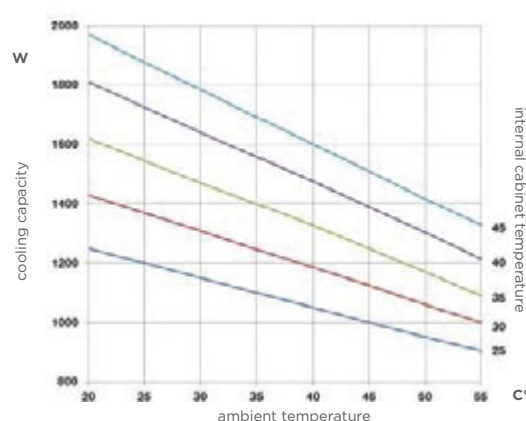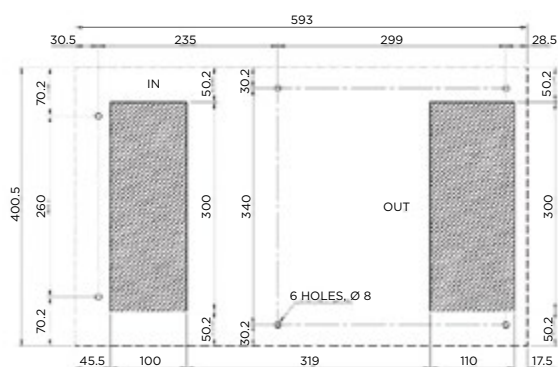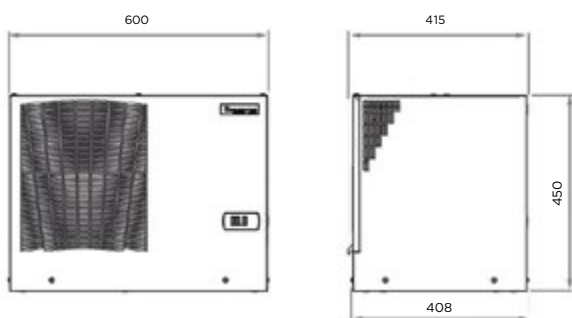

	Unit of measure	KETE14002287001
Power supply	V - ph - Hz	400-2-50 460-2-60
Cooling power L35L35	W	1400
Cooling power L35L50	W	1170
Height/Width/Depth	mm	450x600x400
Max. current, operational	A	2.8
Current absorbed on start-up	A	31
T fuse	A	10
Power absorbed L35L50	W	950
Cabinet ventilation air flow	m ³ /h	575
Temperature regulation limits	°C	25/45
Temperature limits, ambient side	°C	20/55
Cabinet-side protection	IP/Type	54
Noise	dB(A)	58
Weight	kg	53

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Вологда (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://irinox.nt-rt.ru> || ixo@nt-rt.ru